


ISUZU

GIGA



SPECIFICATIONS		FXZ360	
MODEL CODE		FXZ77UU-2E	FXZ77UU-M/S-2E
Drive Train		6 x 4	
ENGINE			
Model		6UZ1-TCC	
Type		6-Cylinder In-line, 4-Cycle, Water-Cooled OHC, Turbo with Intercooler	
Displacement	cc	9,839	
Bore x Stroke	mm	120 x 145	
Maximum Output	kW (PS)@rpm	265 (360)@2,000	
Maximum Torque	Nm (kgm)@rpm	1422 (145)@1,400	
Emission Level		Euro 3	
Fuel System		Common Rail Direct Injection	
TRANSMISSION			
Model / No. of Speed		ZF 9 Speed Manual	
Gear Ratio	C	9.479	
	1st	6.576	
	2nd	4.678	
	3rd	3.478	
	4th	2.617	
	5th	1.890	
	6th	1.345	
	7th	1.000	
	8th	0.752	
	Reverse	8.967	
Final	6.143		
WEIGHT & CAPACITIES			
Gross Vehicle Weight	kg	30,000	
Curb Weight	kg	8,055	7,925
Front	kg	4,130	4,070
Rear	kg	3,925	3,855
Fuel Tank Capacity	l	400 (Aluminium Alloy)	
AXLE			
Front	Type	Reverse Elliot, I-Beam	
Front Axle Capacity (Design)	kg	7,500	
Rear	Type	Banjo, Full floating with Inter-differential Lock	
Rear Axle Capacity (Design)	kg	26,000	
Total Axle Capacity (Design)	kg	33,500	
SUSPENSION SYSTEM			
Suspension	Front	Semi Elliptical Alloy Steel Leaf Spring with Hydraulic Double Acting Telescopic Shock Absorber	
	Rear	Trunnion Semi Elliptic Leaf Springs with Torque Rods	
TYRES & WHEELS			
Tyres		295 / 80R22.5	
Wheels		8.25 x 22.5	
BRAKES			
Service		Full Air, Drum Brake with Auto Adjuster	
Parking Brake Type		Wheel Parking	
Auxiliary		Exhaust Brake	
STEERING			
Steering System		Hydraulic Integral, Recirculating Ball Type	
Min. Turning Radius	m	10.27	8.22
ELECTRICAL			
Battery		12V x 2	
Alternator		24V-60A	
DIMENSION			
Overall Length	OAL mm	10,990	8,530
Overall Width	OAW mm	2,490	
Overall Height	OAH mm	3,005	
Wheelbase	WB mm	5,355 + 1,310	4,045 + 1,310
Front Overhang	FOH mm	1,480	
Rear Overhang	ROH mm	2,845	1,695
Front Tread	AW mm	2,065	
Rear Tread	CW mm	1,850	

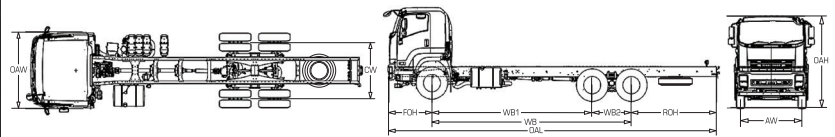

Isuzu Malaysia Sdn. Bhd. is engaged in an ongoing research and development programme, and reserves the right to change specifications, resulting in advancements or technical refinements, without prior notice. All product specifications are within normal manufacturing allowances and tolerances.

ISUZU

ISUZU MALAYSIA SDN BHD (664946-H)
501D, LEVEL 5, TOWER D, UPTOWN 5, NO.5, JALAN SS21/39,
DAMANSARA UPTOWN, 47400 PETALING JAYA, SELANGOR DARUL EHSAN.
GENERAL LINE: 03-7723 9777 FAX: 03-7723 9779
HOTLINE: 1-300-88-1133 www.isuzu.net.my

Dealer's information

Ver.01/Oct2018/BPDCVD_JL

FREE
SERVICE CAMPAIGN



UP TO 100,000km*
*Terms and Conditions apply.

ISUZU

WARRANTY

3

YEARS on
100,000KM
whichever comes first

ISUZU
DOCTOR
MOBILE

24
HOUR ASSISTANCE




Reliable support with
round-the-clock
business operation.
1-800-88-8000



6x4 RIGID

FXZ
360
GVW 30,000kg


PERFORMANCE

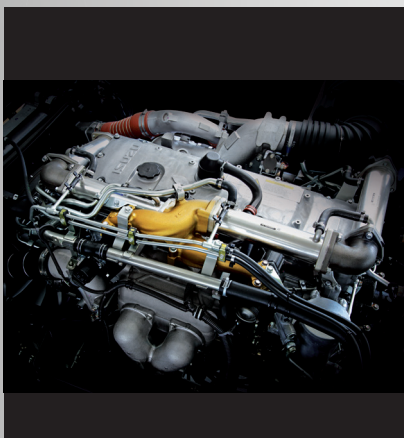


6UZ1-TCC
Displacement: **9,839cc**
Max. Output: **360ps @2,000rpm**
Max. Torque: **1422Nm (145kgm) @1,400rpm**

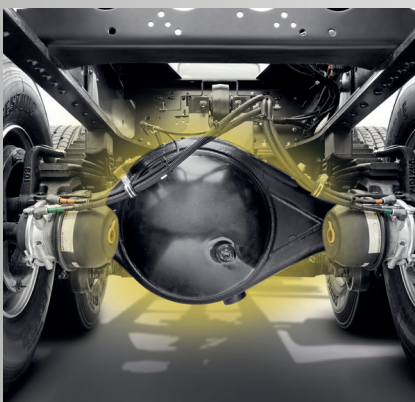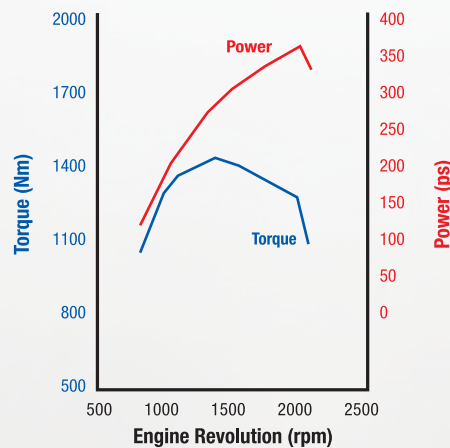

▲ New final ratio for optimum power and torque.

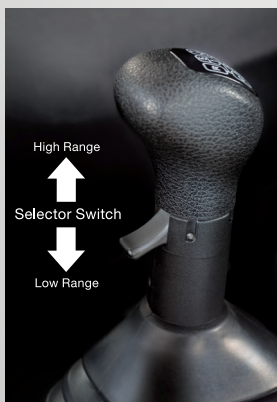

▲ ZF 9-Speed transmission with Crawler Gear.

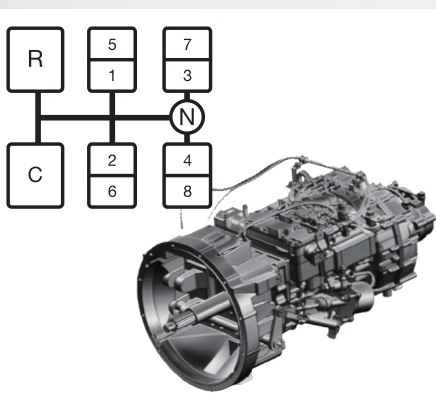

▲ Flywheel Power Take-Off (PTO)
(Applicable to FXZ77UU-M).

EXTERIOR

▼ Electric driven hydraulic cab tilt.



▼ Quick access panel. Designed for convenience, inspecting or replacing clutch fluid, wiper fluid and cabin air filter can be done quickly and safely.



▲ Bigger and durable aluminium alloy fuel tank with lockable cap.



▲ Stabiliser Bar (Applicable to FXZ77UU-M).



▲ Bigger axle capacity with reinforced frame chassis (12mm).

INTERIOR


▼ Ergonomic instrument panel design with ample storage compartments.



▼ Spacious and comfortable cabin.



▼ Air suspension driver's seat.

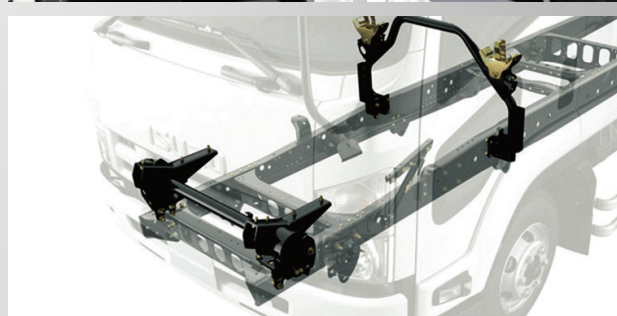



▲ Full floating cabin.

SAFETY

▼ Full Air Wedge Brake with Auto Adjuster.



▼ Door impact beam with high tensile strength reinforcement frame.

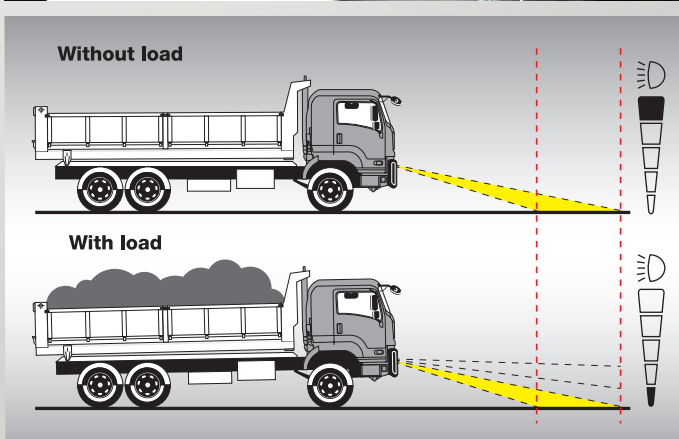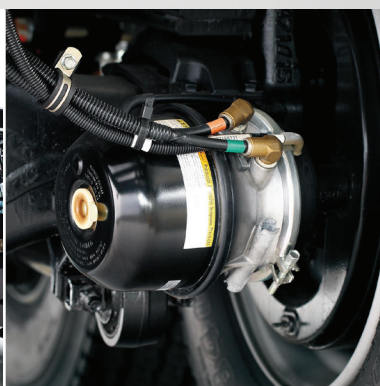

▲ Headlight leveling. Preferred headlight beam position can be maintained when truck is loaded and when it has no load.



▲ High rigidity cab with cation electrodeposition coating.

BODY APPLICATION

MODEL	Standard	ft	FXZ360	
			FXZ77UU-2E	FXZ77UU-M/S-2E
			27.7*	19.6*

Steel Body Tipper	Roll On Roll Off	Wooden Cargo with Detachable Railing	Cement Mixer (Applicable to FXZ77UU-M)

*Body length may vary according to rear body type application. Refer to ISUZU authorised drawing plan for actual body length at ISUZU dealers. Pictures shown are for illustration purposes only.