


SPECIFICATIONS		GXR360		GXZ360	
MODEL CODE		GXR77VU-2E		GXZ77UU-2E	
Drive Train		4 x 2		6 x 4	
ENGINE					
Model		6UZ1-TCC			
Type		6-Cylinder In-line, 4-Cycle, Water-Cooled, OHC, Turbo with Intercooler			
Displacement		cc	9,839		
Bore x Stroke		mm	120 x 145		
Maximum Output		kW (PS)@rpm	265 (360)@2,000		
Maximum Torque		Nm (kgm)@rpm	1422 (145)@1,400		
Emission Level		Euro 3			
Fuel System		Common Rail Direct Injection			
TRANSMISSION					
Model / No. of Speed		ZF 9 Speed Manual			
Gear Ratio	C	9.479			
	1st	6.576			
	2nd	4.678			
	3rd	3.478			
	4th	2.617			
	5th	1.890			
	6th	1.345			
	7th	1.000			
	8th	0.752			
	Reverse	8.967			
	Final	5.375		5.571	
WEIGHT & CAPACITIES					
Gross Vehicle Weight (Design)	kg	18,000		23,000	
Gross Combine Vehicle Weight	kg	37,000		44,000	
Curb Weight	kg	5,990		7,745	
Front	kg	4,010		4,100	
Rear	kg	1,980		3,645	
Fuel Tank Capacity	l	400 (Aluminium Alloy)			
AXLE					
Front	Type	Reverse Elliot, I-Beam			
Front Axle Capacity (Design)	kg	6,600		7,500	
Rear	Type	Banjo, Full Floating with Rear Differential Lock		Banjo, Full Floating with Inter-Differential Lock	
Rear Axle Capacity (Design 1)	kg	12,000		12,600	
Rear Axle Capacity (Design 2)	kg	-		12,600	
Total Axle Capacity (Design 1+2)	kg	12,000		25,200	
SUSPENSION SYSTEM					
Suspension	Front	Taper Leaf Springs with Hydraulic Double Acting Telescopic Shock Absorber, Stabiliser Bar		Semi Elliptical Alloy Steel Leaf Spring with Hydraulic Double Acting Telescopic Shock Absorber, Stabiliser Bar	
	Rear	Air Suspension		Trunnion Semi-Elliptical Leaf Springs with Torque Rods	
TYRES & WHEELS					
Tyres		295 / 80R22.5			
Wheels		8.25 x 22.5			
BRAKES					
Service		Full Air, ABS, Drum Brake			
Parking Brake Type		Wheel Parking			
Auxiliary		Exhaust Brake			
STEERING					
Steering System		Hydraulic Integral, Recirculating Ball Type			
Min. Turning Radius	m	6.81		7.29	
ELECTRICAL					
Battery		12V x 2			
Alternator		24V-60A			
DIMENSION					
Overall Length	OAL mm	5,931		6,920	
Overall Width	OAW mm			2,490	
Overall Height	OAH mm			2,985	
Wheelbase	WB mm	3,480		3,455 + 1,310	
Front Overhang	FOH mm			1,480	
Rear Overhang	ROH mm	971		675	
Front Tread	AW mm	2,025		2,065	
Rear Tread	CW mm	1,840		1,850	



Isuzu Malaysia Sdn. Bhd. is engaged in an ongoing research and development programme, and reserves the right to change specifications, resulting in advancements or technical refinements, without prior notice. All product specifications are within normal manufacturing allowances and tolerances.

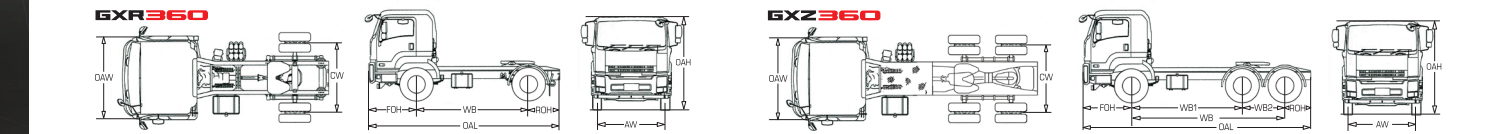

ISUZU MALAYSIA SDN BHD (664946-H)
501D, LEVEL 5, TOWER D, UPTOWN 5, NO.5, JALAN SS21/39,
DAMANSARA UPTOWN, 47400 PETALING JAYA, SELANGOR DARUL EHSAN.
GENERAL LINE: 03-7723 9777 FAX: 03-7723 9779
HOTLINE: 1-300-88-1133 www.isuzu.net.my

Dealer's information

Ver.01/Oct2018/BPDCVD_JL

ISUZU

GIGA



FREE SERVICE CAMPAIGN
UP TO 100,000km*
*Terms and Conditions apply.
ISUZU

WARRANTY
3 YEARS
OR 100,000KM
whichever comes first

ISUZU DOCTOR MOBILE
24 HOURS SERVICE
Reliable support with round-the-clock business operation.
1-800-88-8000

(ABS)
... **FULL AIR BRAKE** ...
AUTO ADJUSTER

PRIME MOVER

GXR 360
GCW 37,000kg





GXZ 360
GCW 44,000kg

PERFORMANCE



6UZ1-TCC

Displacement: **9,839cc**
Max. Output: **360ps @2,000rpm**
Max. Torque: **1422Nm (145kgm) @1,400rpm**

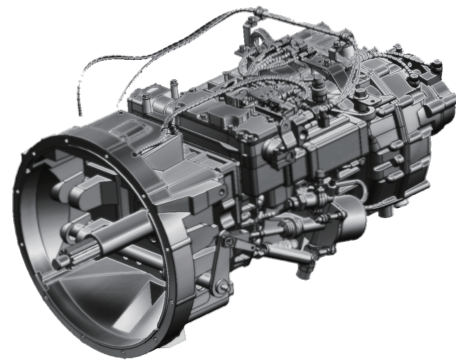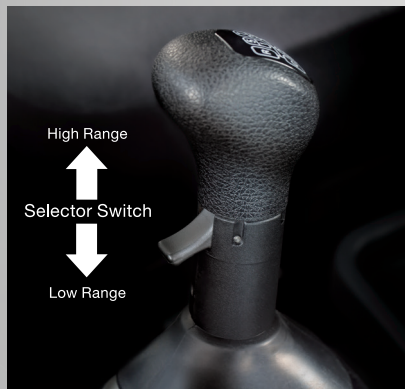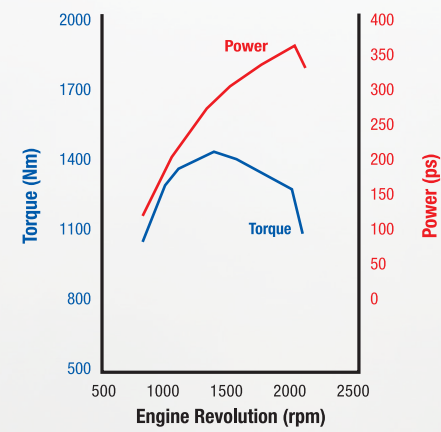


▲ ZF 9-Speed Transmission with Crawler Gear.

EXTERIOR

▼ Electric driven hydraulic cab tilt.



Quick access panel. Designed for convenience, inspecting or replacing clutch fluid, wiper fluid and cabin air filter can be done quickly and safely.

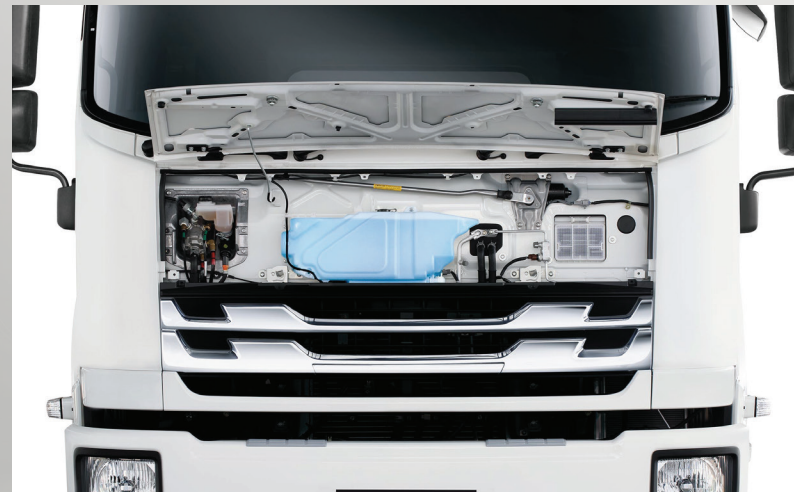

▲ Ancillary fitting includes JOST cast Fifth Wheel, Susie Hose, Step Platform and Parlok Rigid Mudguard.



▲ New chrome fang grille.



▲ Bigger and durable aluminium alloy fuel tank with lockable cap.

INTERIOR


▼ Ergonomic instrument panel design with ample storage compartments.



▼ Spacious and comfortable cabin.




▼ Air suspension driver's seat.

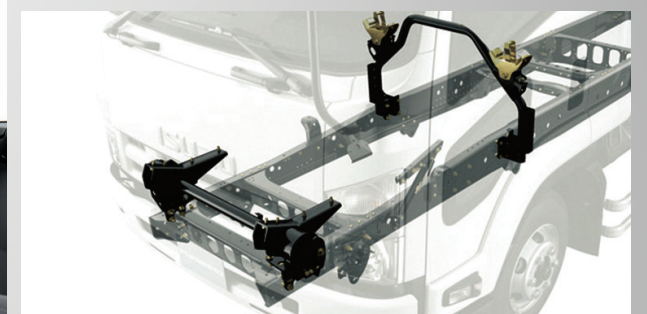


▲ Full floating cabin.

SAFETY


▼ Full Air Brake with Auto Adjuster.

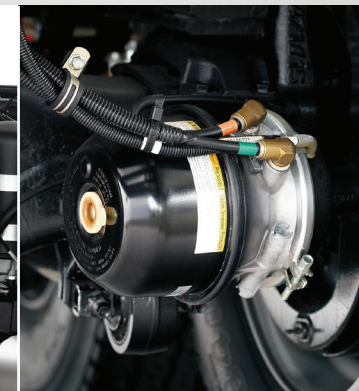

▼ Door impact beam with high tensile strength reinforcement frame.

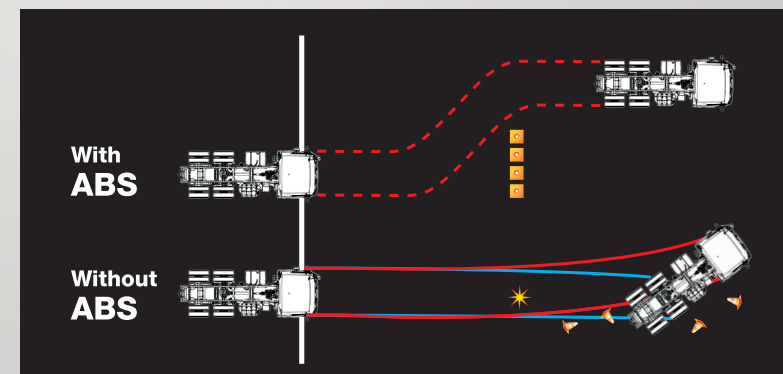


▲ Anti-Lock Braking System (ABS).

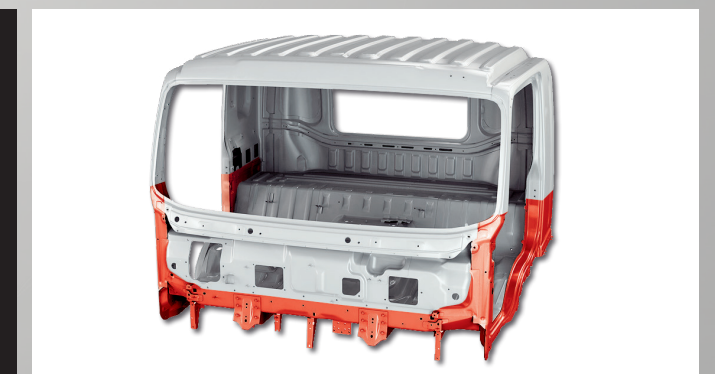

▲ High rigidity cab with cation electrodeposition coating.

BODY APPLICATION

Drive Axle

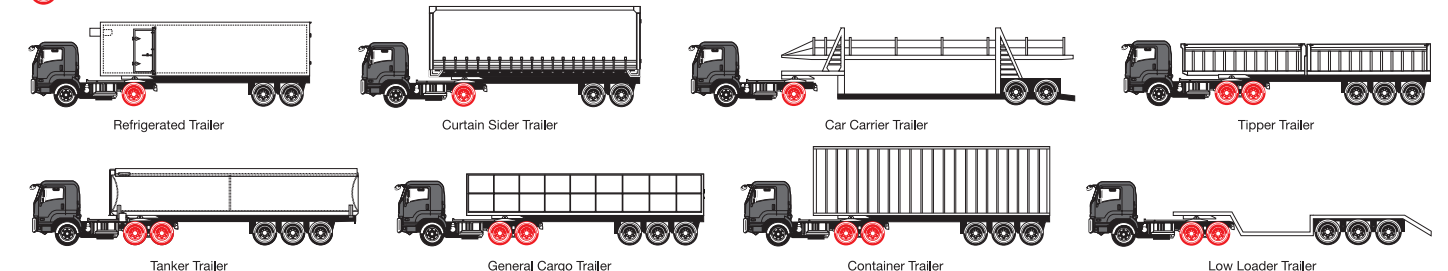

*Body length may vary according to rear body type application. Refer to ISUZU authorised drawing plan for actual body length at ISUZU dealers. Pictures shown are for illustration purposes only.