## 






HEAVY DUTY COMMONRAIL

SPECIFICATIO	NS	FXZ360				
MODEL CODE		FXZ77UU-M				
Drive Train		6 x 4				
ENGINE						
Model		6UZ1-TCC				
Туре		6-Cylinder In-line, 4-Cycle, Water-Cooled OHC, Turbo with Intercooler				
Displacement	CC	9,839				
Bore x Stroke	mm	120 x 145				
Compression Ratio		17.5 : 1				
Maximum Output	kW (PS)@rpm	265 (360)@2,000				
Maximum Torque	Nm (kgm)@rpm	1422 (145)@1,400				
Emission Level		Euro 3				
Fuel System		Common Rail Direct Injection				
WEIGHT & CAPACITIES						
Gross Vehicle Weight	kg	30,000				
Curb Weight	kg	7,925				
Front	kg	4,070				
Rear	kg	3,855				
Fuel Tank Capacity	1	400 (Aluminium Alloy)				
AXLE						
Front	Туре	Reverse Elliot, I-Beam				
Front Axle Capacity (Design)	kg	7,500				
Rear	Туре	Banjo, Full Floating				
Rear Axle Capacity (Design)	kg	26,000				
Total Axle Capacity (Design)	kg	33,500				
SUSPENSION SYSTEM						
Suspension	Front	Semi Elliptical Alloy Steel Leaf Spring with Hydraulic Double Acting Telescopic Shock Absorber				
	Rear	Trunnion Semi Elliptic Leaf Springs with Torque Rods				
TYRES & WHEELS						
Tyres		295 / 80R22.5				
Wheels		8.25 x 22.5				
BRAKES						
Service		Full Air, Drum Brake with Auto Adjuster				
Parking Brake Type		Wheel Parking				
Auxiliary		Exhaust Brake				
STEERING						
Steering System		Hydraulic Integral, Recirculating Ball Type				
Min. Turning Radius	m	10.27				
ELECTRICAL						
Battery		12V x 2				
and the same of the same						






Flywheel Power Take-Off (PTO)

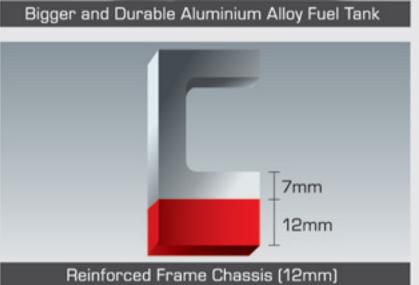




TRANSMISSION	Gear Ratio										
INAIUSIVIISSIOIU	С	1st	2nd	3rd	4th	5th	6th	7th	8th	Reverse	Final
FXZ77UU-M Manual (ZF9S)	9.479	6.576	4.678	3.478	2.617	1.890	1.345	1.000	0.752	8.967	6.143

DIMENSIONS			FXZ77UU-M
Overall Length	OAL	mm	8,530
Overall Width	OAW	mm	2,490
Overall Height	OAH	mm	3,005
Wheelbase	WB	mm	4,045 + 1,310
Front Overhang	FOH	mm	1,480
Rear Overhang	ROH	mm	1,695
Front Tread	AW	mm	2,065
Rear Tread	CW	mm	1,850

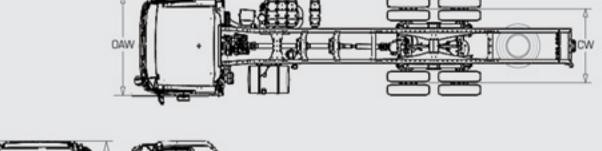



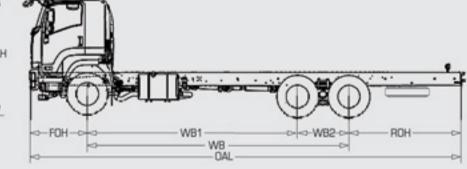

Isuzu Malaysia Sdn. Bhd. is engaged in an ongoing research and development programme, and reserves the right to change specifications, resulting in advancements or technical refinements, without prior notice. All product specifications are within normal manufacturing allowances and tolerances.

Reliable support with round-the-clock husiness operation business operation. **(**1-800-88-8000

24V-60A







Dealer's information



Alternator

## ISUZU MALAYSIA SDN BHD (664946-H)